




The DCS Valencia is an ultra-thin reliable, self-service kiosk that provides digital content in any outdoor environment. The Valencia runs a variety of software applications from Digital Signage to Interactive Wayfinding and Directories. Powered by Windows PC hardware, the Valencia features a sealed, water-resistant, IP65 rated enclosure. In addition, a thermostatically-controlled, heating and cooling fan system prevents the LCD display from "blacking out" in extreme temperatures.

The all steel, zinc-plated, powder-coated kiosk also holds up to harsh weather conditions such as direct rain, bright sunlight, and snow. The Valencia's 3,500-4,000cd/m² LCD display is offered with or without touchscreen capabilities in 43", 55" and 65" single- or double-sided formats. Other options include custom colors, branding, or vinyl wraps as well as integrated peripheral and mounting alternatives.

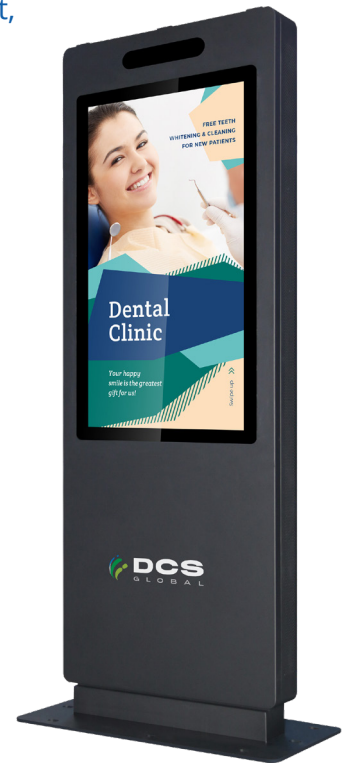

- Fully Waterproof Kiosk
- IP65 Rated Enclosure
- 5°F to 140°F Operational Temp
- Sunlight Readable Panel
- Automatic Brightness Control
- Intelligent Wind Control System

- High Temperature Protection
- Low Temperature Protection
- Air Inlet and Outlet Dust-Proof
- AG Glass Anti-Reflecture Film
- 3 Sets of Insulation
- Electric Leakage Protection

- Fan Cooling
- Integrated Audio
- Key-Lock Door
- Secure Installation
- On-Site Support Warranty
- Ships Fully Assembled



MALLS



STADIUMS & AMUSEMENT PARKS



TRANSPORTATION




MUNICIPALITIES & UNIVERSITIES



HOSPITALITY

Digital Signage • Interactive Wayfinding/Directories • DOOH Advertising • Traffic Information

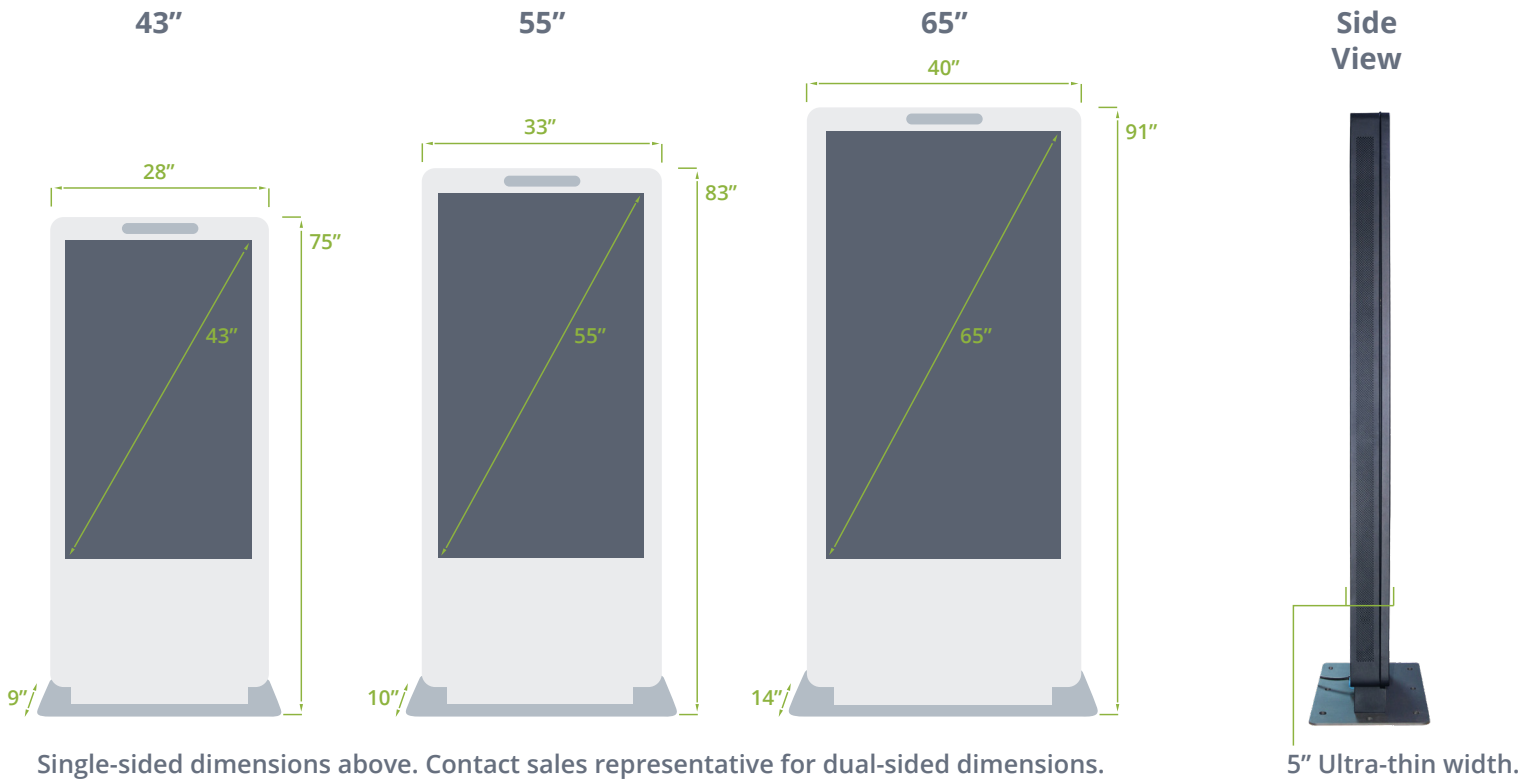

KIOSK PC

Operating System	Windows 10
CPU	Intel i3, i5, or i7
RAM	8, 16, or 32GB DDR4
Storage	128GB or 1T SSD
Connectivity	WiFi, Ethernet
Input/Output	HDMI, VGA, RJ-45, USB2.0 x4
Audio	Realtek ALC662 6-Channel HD Audio CODEC

OPTIONAL HARDWARE

Touchscreen	10-Point PCAP
Cooling System	Air Conditioner
Connectivity	5G from AT&T

SPECIFICATIONS	43"	55"	65"
Max Resolution	1920x1080	3840x2160	3840x2160
Aspect Ratio	16:9	16:9	16:9
Brightness	3500cd/m ²	3500cd/m ²	3500cd/m ²
Weight	230 lbs	255 lbs	280 lbs

TEMPERATURE -5°F to 140°F (Operational)

CERTIFICATION CE/FCC/RoHS

WARRANTY One Year On-Site Support; Extended Warranties Available